




BULTEK compressors are an effective response to the increasing demand **for silent, reliable, low-priced tank-mounted compressors.**

For this range, we use conventional tank-mounted compressors to which we add a specially designed case to reduce the level of noise to 68/69 dB(A).

The case is installed on supports with dampers to eliminate vibration.

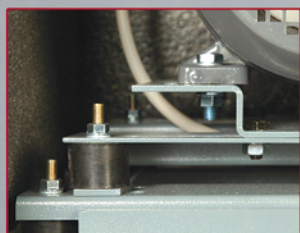

STRUCTURE WITH VIBRATION DAMPERS
Double anti-vibration support to eliminate vibration and reduce the level of noise.



FAN
It guarantees optimum cooling including in heavy operating conditions.



PRESSURE SWITCH
Pressure switch with thermal circuit-breaker.


Bultek

Starting from the BULTEK 500 model, compressor compartment cooling is achieved by means of an electric fan controlled by a thermostatic probe.

A protective grid is installed to the fan in order to guarantee maximum safety.

The range includes a version on wheels (compressors with 270-litre tank), and a version for permanent installation (compressors with 500-litre tank).

Other key features of this compressor line include: low number of revolutions at the pumping unit, low noise level, fair balance between unit size, motor power and tank capacity.

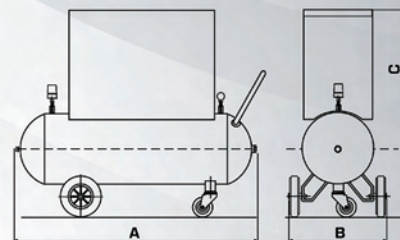

MOD.	REFERENCE	Volt/Hz	m ³ /min	cfm	Stages	pist	HP	KW	Bar	dB(A)	Tank	Weight	Dimension		
SINGLE PHASE - Volt/Hz 230/50															
250/100	CPB25E10A	230/50	0,220	7,8	1	2	2	1,5	10	60	100	87	1200	450	960
350/200	CPB35F10A	230/50	0,321	11,3	1	2	3	2,2	10	62	200	115	1560	520	1020
THREE PHASE - Volt/Hz 400/50															
350/200	CPB35F10B	400/50	0,321	11,3	1	2	3	2,2	10	62	200	115	1560	520	1020
500/270	CPB50G11B	400/50	0,495	17,5	2	2	4	3	11	65	270	175	1560	520	1200
580/270	CPB58G11B	400/50	0,578	20,4	2	2	5,5	4	11	65	270	175	1700	700	1280
580/270 X	CPB58G11D	400/50	0,578	20,4	2	2	5,5	4	11	65	270	180	1700	700	1280
580/500	CPB58L11B	400/50	0,578	20,4	2	2	5,5	4	11	65	500	195	2000	700	1350
580/500 X	CPB58L11D	400/50	0,578	20,4	2	2	5,5	4	11	65	500	195	2000	700	1350
640/500	CPB65L11B	400/50	0,644	22,9	2	2	5,5	4	11	65	500	196	2000	700	1350
640/500 X	CPB65L11D	400/50	0,644	22,9	2	2	5,5	4	11	65	500	196	2000	700	1350
850/500	CPB85L11B	400/50	0,872	31	2	2	7,5	5,5	11	65	500	198	2000	700	1350
850/500 X	CPB85L11D	400/50	0,872	31	2	2	7,5	5,5	11	65	500	198	2000	700	1350

X= star-delta starting

The manufacturer may change the above-mentioned technical specifications without prior notice.

All BULTEK electro-compressors comply with the following European directives and standards: 98/37/EC - 87/404/EC - 97/23/EC - 89/336/EC - 73/23/EC - EN60204-1-EN - 1012/1 - EN 292-1-2

For more information, please contact your nearest dealer or:

 **BOTTARINI**